

MDPRO6000

Patient Monitor

The MDPRO6000 patient monitor can meet various environments' main clinical requirements, including emergency rooms, general wards, rehabilitation centers, cardiac intensive care units, and transfer wards in hospitals. The MDPRO6000 is equipped with a unique 3/5-lead system with automatic chest lead identification, making cardiac monitoring more flexible. The MDPRO6000 utilizes the iSEAP™ ECG monitoring algorithm which includes 33 types of arrhythmia detections and the SEMIP® The ECG diagnosis algorithm.

Standard Parameters: ECG (3-5 Lead), RESP, SpO2, NIBP, TEMP, PR, HR, 2-Temp

Standard Features: Touch screen, WiFi, USB, 12-inch screen, VGA output, 8GB internal memory, Dual IBP slots

Optional Configurations: ECG (6-12 Lead), G2 CO2, Cardiac Output

Optional Features: Thermal Recorder, Nurse Call (with CMS), Defibrillator Synchronization



1200

NIBP Measurement

240 h

Trend Review

200

Alarm Review


48 h

Frozen Waveform

Proprietary Algorithms & Technologies

MDPro G2 CO2 (sidestream)

Superior water trap design for accurate monitoring
 iCARB algorithm with Intelligent CO2 pseudo wave identification technology
 sampling rate as low as 50ml/min.
 Accessories for all patient types

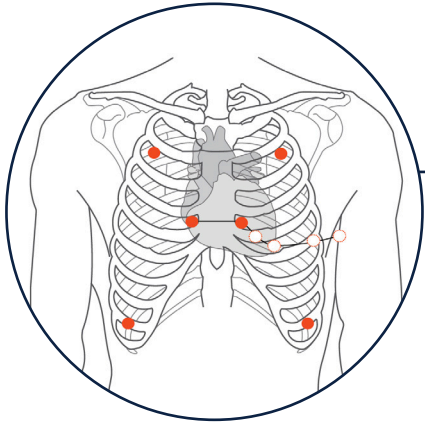

ECG

12-lead ST analysis optional with additional internal module upgrade
 Customizable 3/5-lead placement for more ECG waves.
 Automatic lead type detection.
 Industry leading iSEAPT™ algorithm with auto-detection of 33 types of arrhythmias.
 SEMIP® algorithm with 208 ECG findings over age/gender diversities.

NIBP

Dual dust filter design makes no blockage inside and provides accurate NIBP readings.
 Unique cleaning mode for routine maintenance.
 iCUFSTM algorithm with smart deflation technology.



SpO2

iMAT algorithm with motion resistance and low perfusion resistance performance.
 Reference reading of Perfusion Index (PI) from 0 to 10 according to perfusion changes.
 Simultaneous measurements of SpO2 and NIBP of the same limb.

12.1"

